



規格寸法図

■ 標準タイプ

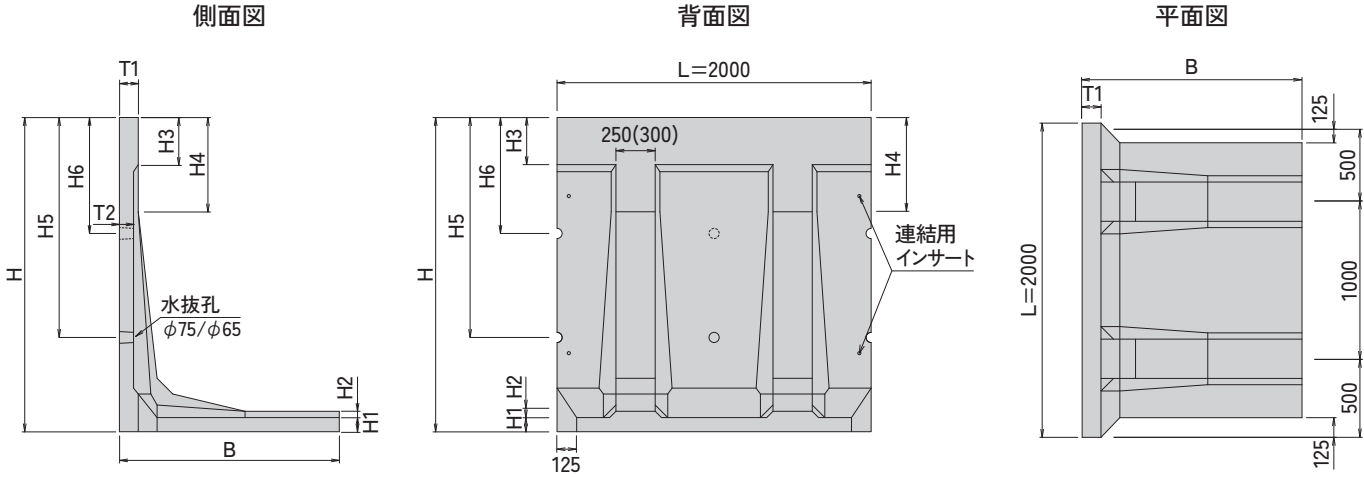

■ フェンスタイプ

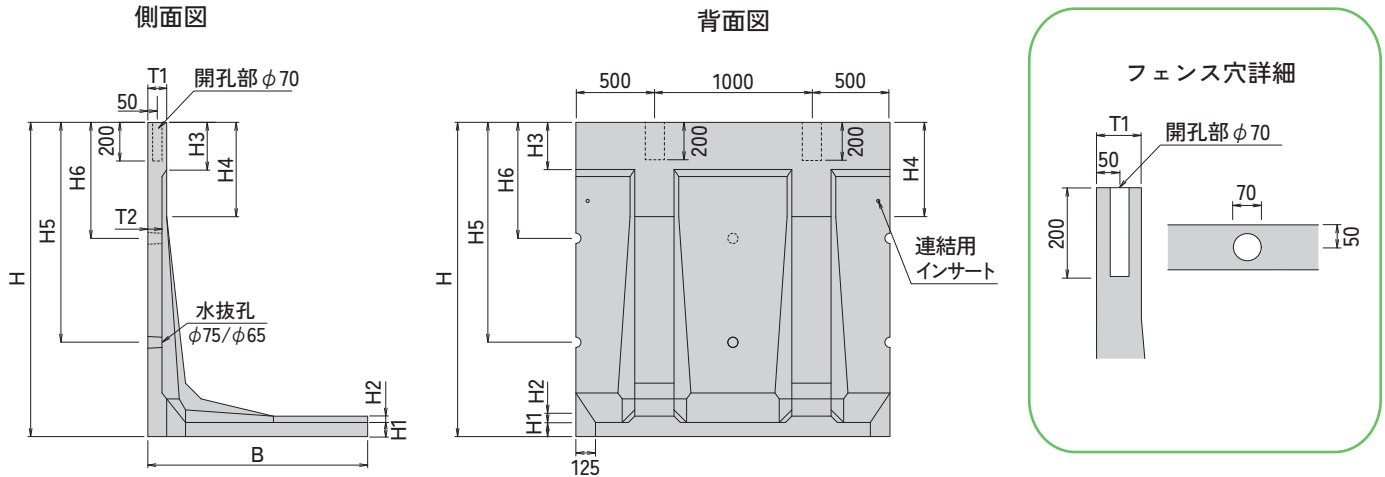


表面模様 詳細図

ハイパーロードL型擁壁 模様タイプの下部は滑面が露出しております。(下図参照) また、模様面飛び出し 20mm ございます。

■ 滑面下部寸法 単位 mm

H	h
500	—
750	150
1000	200
1250	250
1500	250
1750	250
2000	250
2250	250
2500	250
2750	250
3000	250

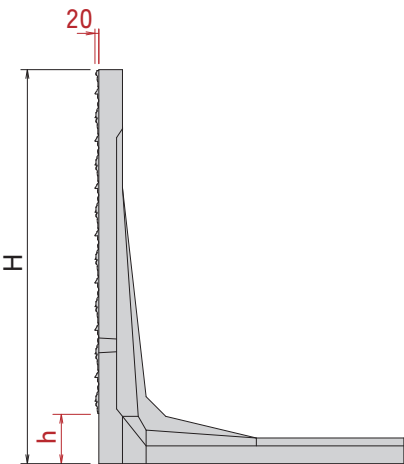

■ 規格寸法表

呼び名 H	タイプ	規格寸法(mm)									参考質量 (kg)	基礎工数量(延長10m当り)			
		B	H1	H2	H3	H4	H5	H6	T1	T2		基礎 コンクリート(m³)	基礎型枠 (m²)	基礎材 (m²)	敷モルタル (m²)
500	A	400	70	30	100	200	250	-	100	70	325	0.600	2.00	8.00	0.120
	A	600	70	30	100	200	250	-	100	70	499	0.800	2.00	10.00	0.180
	B	750									548	0.950		11.50	0.225
750	C	900	70	30	200	300	375	-	100	70	598	1.100	2.00	13.00	0.270
	A	800									684	1.000		12.00	0.240
	B	1000	70	30	250	350	600	-	100	70	750	1.200	2.00	14.00	0.300
1000	C	1200									816	1.400		16.00	0.360
	A	1000	80	20	300	500	750	-	100	80	957	1.200	2.00	14.00	0.300
	B	1250									1047	1.450		16.50	0.375
1250	C	1500	80	30	300	500	1000	-	100	80	1137	1.700	2.00	19.00	0.450
	A	1050									1111	1.250	2.00	14.50	0.315
	B	1200	80	30	300	500	1000	-	100	80	1167	1.400		16.00	0.360
1500	C	1350									1224	1.550	2.00	17.50	0.405
	D	1500	90	35	300	600	1150	-	120	90	1280	1.700	2.00	19.00	0.450
	A	1225									1498	1.425	2.00	16.25	0.368
1750	B	1400	90	35	300	600	1150	-	120	90	1573	1.600		18.00	0.420
	C	1575									1647	1.775	2.00	19.75	0.473
	D	1750	90	40	300	600	1400	-	120	90	1722	1.950		21.50	0.525
2000	A	1400									1785	1.600	2.00	18.00	0.420
	B	1600	90	40	300	600	1400	-	120	90	1872	1.800		20.00	0.480
	C	1800									1958	2.000	2.00	22.00	0.540
2250	D	2000	100	45	300	600	1650	-	120	90	2045	2.200		24.00	0.600
	A	1575									2144	1.775	2.00	19.75	0.473
	B	1800	100	45	300	600	1650	-	120	90	2253	2.000		22.00	0.540
2500	C	2025									2362	2.250	2.00	24.25	0.608
	D	2250	100	50	300	600	1900	-	120	90	2470	2.450		26.50	0.675
	A	1750									2481	1.950	2.00	21.50	0.525
2750	B	2000	120	55	300	600	2000	-	120	90	2604	2.200		24.00	0.600
	C	2250									2727	2.450	2.00	26.50	0.675
	D	2500	120	55	300	600	2000	-	120	90	2850	2.700		29.00	0.750
3000	A	1925									2966	2.125	2.00	23.25	0.578
	B	2200	120	60	300	600	2250	-	120	90	3126	2.400		26.00	0.660
	C	2475									3287	2.675	2.00	28.75	0.743
3250	D	2750	160	70	250	950	2500	1500	160	120	3448	2.950		31.50	0.825
	A	2100									3359	2.300	2.00	25.00	0.630
	B	2400	120	60	300	600	2250	-	120	90	3536	2.600		28.00	0.720
3500	C	2700									3714	2.900	2.00	31.00	0.810
	D	3000	160	70	500	1200	2500	1500	160	120	3892	3.200		34.00	0.900
	A	2275									4885	2.475	2.00	26.75	0.683
3750	B	2600	160	70	500	1200	2500	1500	160	120	5149	2.800		30.00	0.780
	A	2450									5216	2.650	2.00	28.50	0.735
	B	2800	160	80	250	950	3000	2000	160	120	5495	3.000		32.00	0.840
4000	A	2625									6090	2.825	2.00	30.25	0.788
	B	3000	160	80	500	1200	3000	2000	160	120	6397	3.200		34.00	0.900
	A	2800									6425	3.000	2.00	32.00	0.840
4250	B	3200	200	90	250	1250	3250	2250	200	150	6752	3.400		36.00	0.960
	A	2975									8226	3.175	2.00	33.75	0.893
	B	3400	200	90	250	1250	3250	2250	200	150	8654	3.600		38.00	1.020
4500	A	3150									8642	3.350	2.00	35.50	0.945
	A	3325	200	100	250	1250	3750	2500	200	150	9817	3.525		37.25	0.998
	A	5000									10238	3.700	2.00	39.00	1.050

1. 標準タイプ（割レンガ模様）は最大20mmの飛び出しがあります。 ※H3500～5000の製品はトレーラーにて運搬となります。
2. 滑面タイプはH=500～3000の範囲で100mmピッチで製作が可能です(受注生産品)
3. フェンスタイプはH=750～5000の範囲で250mmピッチで製作が可能です(受注生産品)