


配筋

TIGHT
LOCK


● A形(基本)配筋図

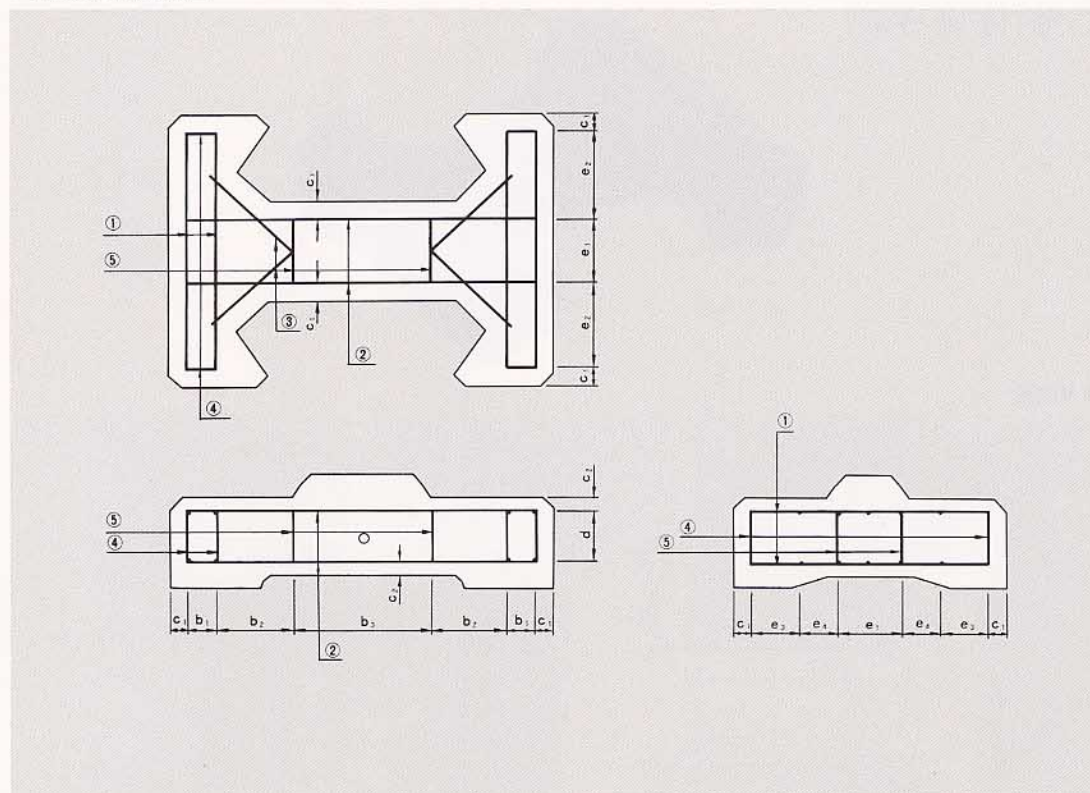

● 鉄筋表


呼び名	鉄筋の 種 別	径 (mm)	本の長さ (m)	本数 (本)	総長 (m)	単位質量 (kg/m)	質量 (kg)	総質量 (kg)	b ₁ (mm)	b ₂ (mm)	b ₃ (mm)	c ₁ (mm)	c ₂ (mm)	d (mm)	e ₁ (mm)	e ₂ (mm)	e ₃ (mm)	e ₄ (mm)
0.5 t 型	①	D10	0.86	8	6.88	0.560	3.853	9.06	104	250	452	60	60	168	232	304	200	104
	②	D10	1.18	4	4.72	0.560	2.643											
	③	D10	0.37	8	2.96	0.560	1.658											
	④	φ 6	0.60	4	2.40	0.222	0.533											
	⑤	φ 6	0.86	2	1.72	0.222	0.382											
1 t 型	①	D10	1.06	8	8.48	0.560	4.749	11.44	125	326	538	80	60	240	280	380	194	186
	②	D10	1.46	4	5.84	0.560	3.270											
	③	D10	0.50	8	4.00	0.560	2.240											
	④	φ 6	0.79	4	3.16	0.222	0.702											
	⑤	φ 6	1.10	2	2.20	0.222	0.488											
2 t 型	①	D10	1.36	8	10.88	0.560	6.093	14.36	200	376	688	80	80	290	390	475	294	181
	②	D10	1.86	4	7.44	0.560	4.166											
	③	D10	0.57	8	4.56	0.560	2.554											
	④	φ 6	1.04	4	4.16	0.222	0.924											
	⑤	φ 6	1.42	2	2.84	0.222	0.630											
3 t 型	①	D10	1.57	8	12.56	0.560	7.034	20.15	250	401	818	80	80	353	467	542	369	173
	②	D13	2.14	4	8.56	0.995	8.517											
	③	D10	0.61	8	4.88	0.560	2.733											
	④	φ 6	1.26	4	5.04	0.222	1.119											
	⑤	φ 6	1.70	2	3.40	0.222	0.755											
4 t 型	①	D10	1.75	8	14.00	0.560	7.840	27.91	255	471	908	80	80	407	533	599	399	200
	②	D16	2.38	4	9.52	1.560	14.851											
	③	D10	0.70	8	5.60	0.560	3.136											
	④	φ 6	1.38	4	5.52	0.222	1.225											
	⑤	φ 6	1.94	2	3.88	0.222	0.861											
5 t 型	①	D10	1.90	8	15.20	0.560	8.512	30.74	296	578	812	80	80	452	588	646	362	284
	②	D16	2.58	4	10.32	1.560	16.099											
	③	D10	0.85	8	6.80	0.560	3.808											
	④	φ 6	1.55	4	6.20	0.222	1.376											
	⑤	φ 6	2.14	2	4.28	0.222	0.950											

● B形(端部)配筋図

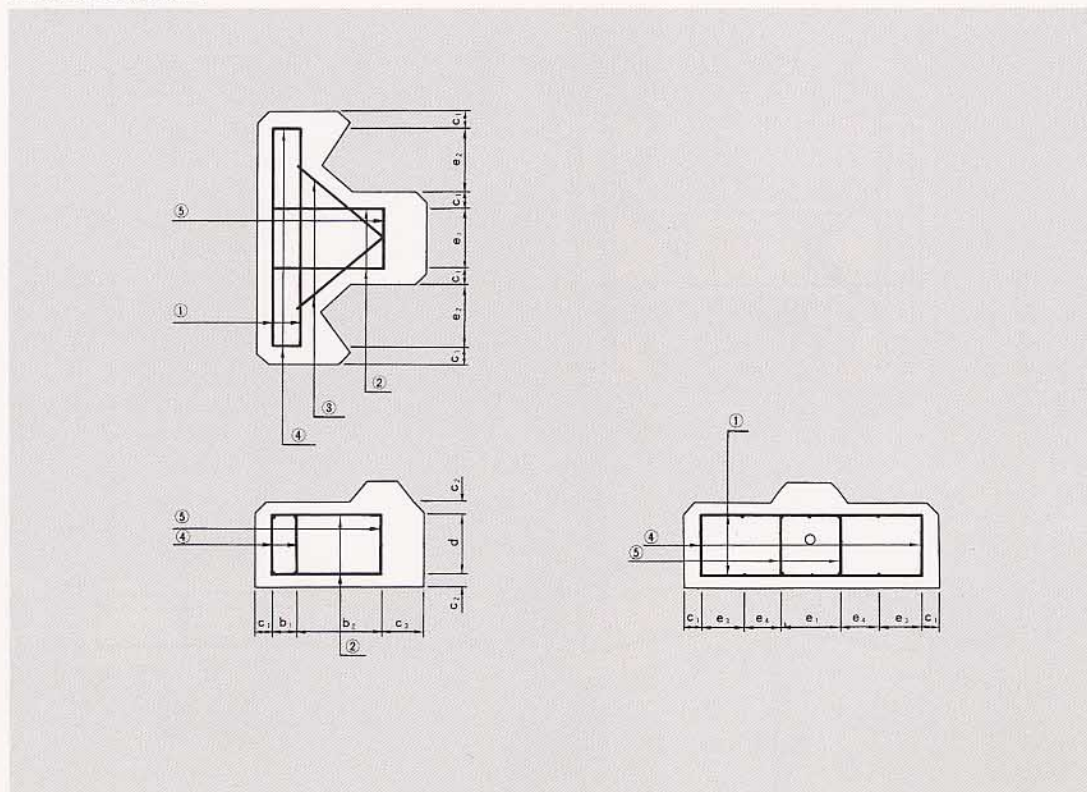

● 鉄筋表


呼び名	鉄筋の 種 別	径 (mm)	1本の長さ (m)	本数 (本)	総長 (m)	単位質量 (kg/m)	質量 (kg)	総質量 (kg)	b ₁ (mm)	b ₂ (mm)	c ₁ (mm)	c ₂ (mm)	c ₃ (mm)	d (mm)	e ₁ (mm)	e ₂ (mm)	e ₃ (mm)	e ₄ (mm)
0.5 t 型	①	D 10	0.86	4	3.44	0.560	1.926	4.35	104	304	60	60	140	200	232	244	160	144
	②	D 10	0.42	4	1.68	0.560	0.941											
	③	D 10	0.44	4	1.76	0.560	0.986											
	④	φ 6	0.66	2	1.32	0.222	0.293											
	⑤	φ 6	0.92	1	0.92	0.222	0.204											
1 t 型	①	D 10	1.06	4	4.24	0.560	2.374	5.28	125	355	80	60	200	280	280	300	200	180
	②	D 10	0.50	4	2.00	0.560	1.120											
	③	D 10	0.51	4	2.04	0.560	1.142											
	④	φ 6	0.87	2	1.74	0.222	0.386											
	⑤	φ 6	1.18	1	1.18	0.222	0.262											
2 t 型	①	D 10	1.36	4	5.44	0.560	3.046	6.62	200	400	80	80	270	340	390	395	270	205
	②	D 10	0.62	4	2.48	0.560	1.389											
	③	D 10	0.60	4	2.40	0.560	1.344											
	④	φ 6	1.14	2	2.28	0.222	0.506											
	⑤	φ 6	1.52	1	1.52	0.222	0.337											
3 t 型	①	D 10	1.57	4	6.28	0.560	3.517	8.94	250	453	80	80	300	410	467	462	300	242
	②	D 13	0.72	4	2.88	0.995	2.866											
	③	D 10	0.69	4	2.76	0.560	1.546											
	④	φ 6	1.38	2	2.76	0.222	0.613											
	⑤	φ 6	1.81	1	1.81	0.222	0.402											
4 t 型	①	D 10	1.75	4	7.00	0.560	3.920	11.74	255	532	80	80	330	470	533	519	370	229
	②	D 16	0.80	4	3.20	1.560	4.992											
	③	D 10	0.76	4	3.04	0.560	1.702											
	④	φ 6	1.51	2	3.02	0.222	0.670											
	⑤	φ 6	2.06	1	2.06	0.222	0.457											
5 t 型	①	D 10	1.90	4	7.60	0.560	4.256	12.96	296	578	80	80	338	520	588	566	362	284
	②	D 16	0.89	4	3.56	1.560	5.554											
	③	D 10	0.85	4	3.40	0.560	1.904											
	④	φ 6	1.69	2	3.38	0.222	0.750											
	⑤	φ 6	2.27	1	2.27	0.222	0.504											



配筋

**TIGHT
LOCK**

● C形(法肩/3割)配筋図

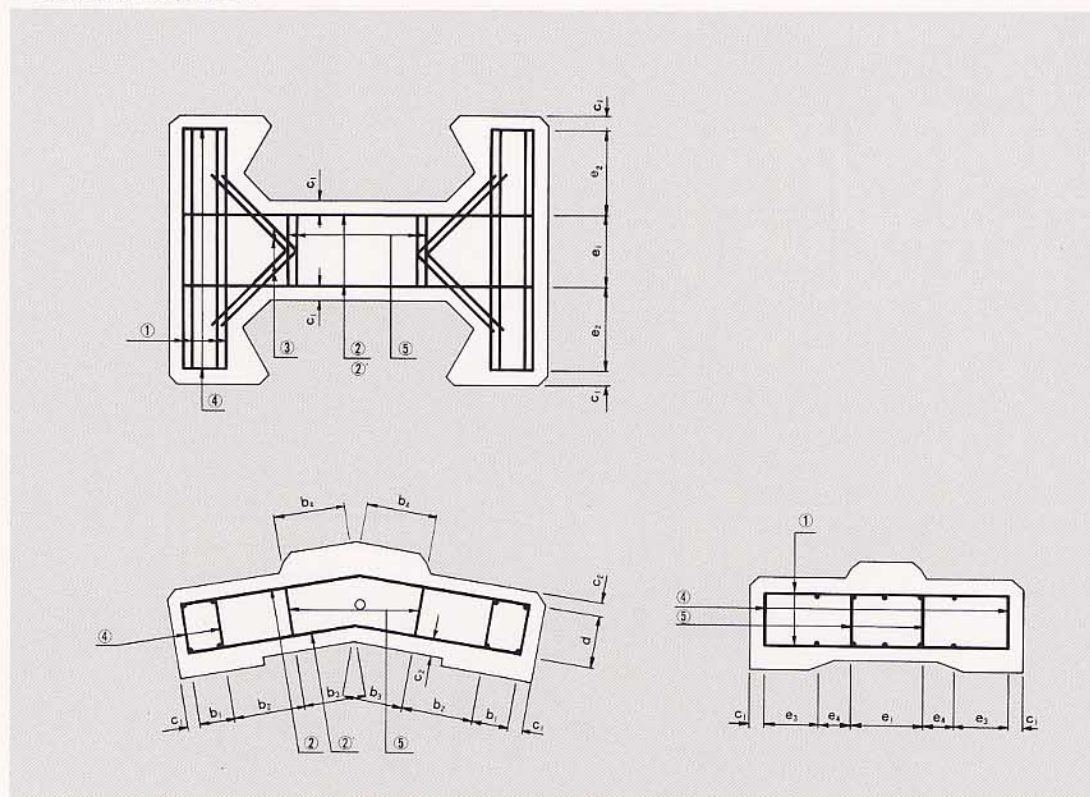

● 鉄筋表

呼び名	鉄筋の 種 別	径 (mm)	1本の長さ (m)	本数 (本)	総長 (m)	単位質量 (kg/m)	質量 (kg)	総質量 (kg)	b ₁ (mm)	b ₂ (mm)	b ₃ (mm)	b ₄ (mm)	c ₁ (mm)	c ₂ (mm)	d (mm)	e ₁ (mm)	e ₂ (mm)	e ₃ (mm)	e ₄ (mm)
2 t 型	①	D 10	1.36	8	10.88	0.560	6.093	14.58	200	376	365	412	80	80	290	390	475	294	181
	②	D 10	2.00	2	4.00	0.560	2.240												
	②'	D 10	1.91	2	3.82	0.560	2.139												
	③	D 10	0.57	8	4.56	0.560	2.554												
	④	φ 6	1.04	4	4.16	0.222	0.924												
	⑤	φ 6	1.42	2	2.84	0.222	0.630												
3 t 型	①	D 10	1.57	8	12.56	0.560	7.034	20.58	250	401	431	489	80	80	353	467	542	369	173
	②	D 13	2.30	2	4.60	0.995	4.577												
	②'	D 13	2.19	2	4.38	0.995	4.358												
	③	D 10	0.61	8	4.88	0.560	2.733												
	④	φ 6	1.27	4	5.08	0.222	1.128												
	⑤	φ 6	1.70	2	3.40	0.222	0.755												
4 t 型	①	D 10	1.75	8	14.00	0.560	7.840	28.64	255	471	477	543	80	80	407	533	599	399	200
	②	D 16	2.56	2	5.12	1.560	7.987												
	②'	D 16	2.43	2	4.86	1.560	7.582												
	③	D 10	0.70	8	5.60	0.560	3.136												
	④	φ 6	1.39	4	5.56	0.222	1.234												
	⑤	φ 6	1.94	2	3.88	0.222	0.861												
5 t 型	①	D 10	1.90	8	15.20	0.560	8.512	31.53	296	578	430	503	80	80	452	588	646	362	284
	②	D 16	2.78	2	5.56	1.560	8.674												
	②'	D 16	2.63	2	5.26	1.560	8.206												
	③	D 10	0.85	8	6.80	0.560	3.808												
	④	φ 6	1.56	4	6.24	0.222	1.385												
	⑤	φ 6	2.14	2	4.28	0.222	0.950												