



OKZ 300・360・450 設置場所：歩行部

■ OKZ/嵩上げ柵

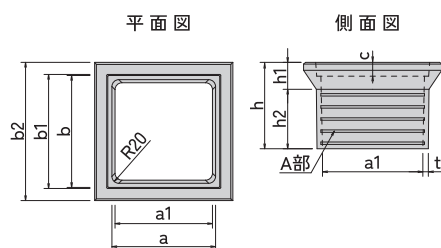

呼び名	寸法 (mm)										参考質量 (kg)
	a	a1	b	b1	b2	c	h	h1	h2	t	
300	300	288	324	330	400	30	250	78	172	15	9
360	360	343	389	395	477	40	250	80	170	15	15
450	450	441	484	492	572	45	250	95	155	17	20

■ OKZ/浸透

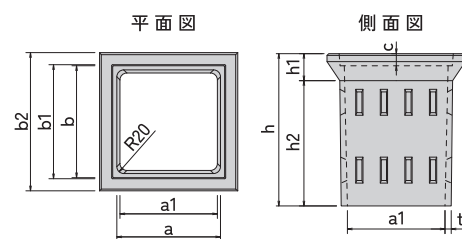

呼び名	寸法 (mm)										参考質量 (kg)
	a	a1	b	b1	b2	c	h	h1	h2	t	
OKZ300	300	282	324	330	400	30	440	78	362	18	14
OKZ360	360	339	389	395	477	40	500	80	420	17	25
OKZ450	450	390	450	492	580	45	600	95	505	40	108