



許容土被り

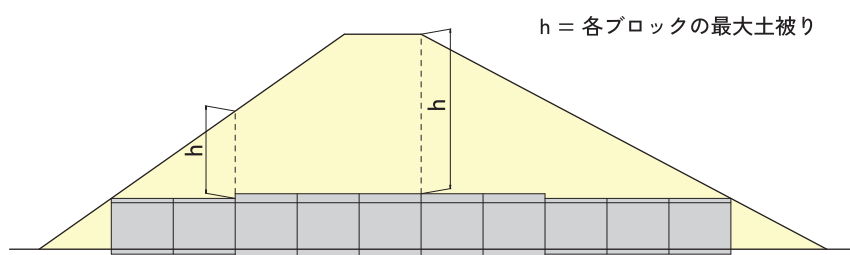

呼び名		許容最大土被り (m)		
B	H	I 型	II 型	特厚型
800	560	5.6	—	—
	640	5.7	—	—
	720	5.8	—	—
	800	5.9	—	13.8
	880	6.1	—	14.0
	960	6.4	—	14.4
1000	700	5.3	7.5	—
	800	5.2	7.7	—
	900	5.6	7.7	—
	1000	5.6	7.8	12.4
	1100	5.6	8.0	12.7
	1200	5.6	8.3	13.0
1200	840	5.2	7.0	—
	960	5.2	7.2	—
	1080	5.2	7.4	—
	1200	5.3	7.7	10.4
	1320	5.3	7.8	10.7
	1440	5.3	8.1	11.4
1500	1050	4.9	6.1	—
	1200	4.8	6.3	—
	1350	4.9	6.5	—
	1500	4.9	6.7	9.3
	1650	5.1	6.8	9.6
	1800	5.1	7.1	10.1
1800	1260	3.6	6.4	—
	1440	3.5	6.3	—
	1620	3.5	6.3	—
	1800	4.4	6.3	8.7
	1980	4.5	6.4	9.1
	2160	4.7	6.7	9.7

呼び名		許容最大土被り (m)		
B	H	I 型	II 型	特厚型
2000	1400	3.9	6.1	—
	1600	4.1	6.0	—
	1800	4.1	6.0	—
	2000	4.1	6.1	9.2
	2200	4.3	6.2	9.5
	2400	4.4	6.5	10.0
2200	1540	3.4	5.9	—
	1760	3.3	5.8	—
	1980	3.3	5.8	—
	2200	3.4	5.9	8.9
	2420	3.5	6.0	9.3
	2640	3.6	6.3	9.8
2500	1750	3.3	5.3	—
	2000	3.3	5.2	—
	2250	3.3	5.2	—
	2500	3.3	5.2	8.7
	2750	3.4	5.4	9.1
	3000	3.3	5.6	9.7
2800	1960	3.4	4.6	—
	2240	3.3	4.5	—
	2520	3.2	4.5	—
	2800	3.3	4.6	8.2
	3080	3.4	4.8	8.7
	3200	3.3	4.8	9.0
3000	2100	3.3	4.6	—
	2400	3.2	4.5	—
	2700	3.2	4.5	—
	3000	3.2	4.6	8.1
	3200	3.3	4.7	8.4

※ 最小土被りは、0.5mです。

※ 「アーチカルバート設計施工要覧（第8版）」による